




TRI-MAG, Inc.
 your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
tri-mag@worldnet.att.net

ISOLATOR ENCLOSURES

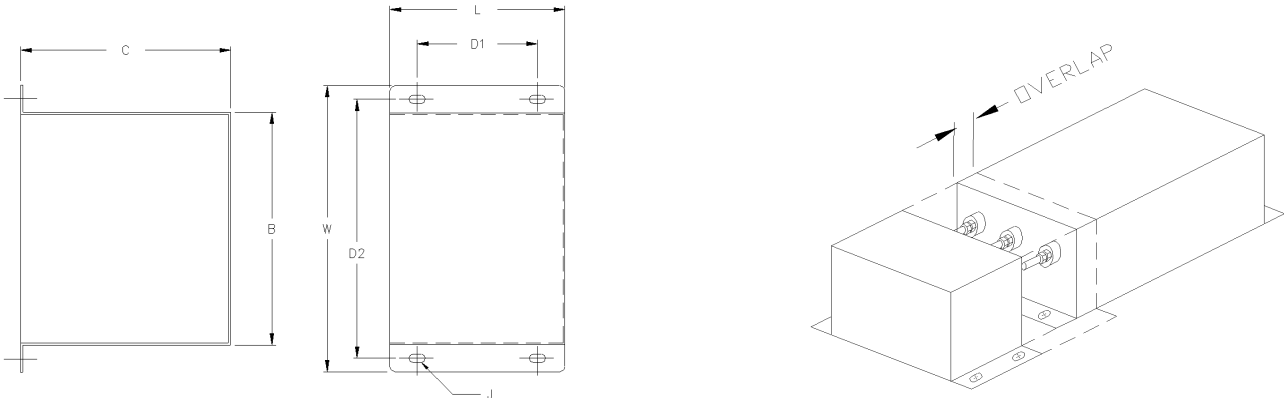

FEATURES AND SPECIFICATIONS

1.0 DIMENSIONS

PART NUMBER	B	C	L	W	D1	D2	J
ISO288200	2.95	2.05	2.00	3.67	—	3.32	0.156X0.250
ISO300275	3.09	2.81	3.00	4.30	1.75	3.70	0.180X0.370
ISO331150	3.41	1.55	2.50	4.10	1.50	3.75	0.156X0.250
ISO425275	4.37	2.87	4.00	5.55	2.75	4.95	0.180x0.370
ISO400400	4.13	4.06	4.00	5.30	2.75	5.30	0.180x0.370
ISO500300	5.13	3.06	4.00	6.31	2.75	5.71	0.180x0.300
ISO500400	5.13	4.06	4.00	6.31	2.75	5.70	0.180x0.370
ISO500475	5.13	4.81	4.00	6.31	2.75	5.70	0.180x0.370
ISO650475	6.63	4.81	4.00	7.81	2.75	7.21	0.180x0.370
ISO750475	7.63	4.81	4.00	8.81	2.75	8.21	0.180x0.370
ISO750575	7.63	5.81	4.00	8.81	2.75	8.21	0.180x0.370

APPLICATION

- * SINGLE PHASE FILTERS
- * THREE PHASE FILTERS
- * THREE PHASE REACTORS

FEATURES

- * REDUCE RADIATED RFI
- * PREVENT COUPLING
- * PROVIDE NO-FINGER TOUCH SAFETY