


THREE PHASE WYE FILTERS, 250/440VAC, TPYA FILTERS



FEATURES AND SPECIFICATIONS

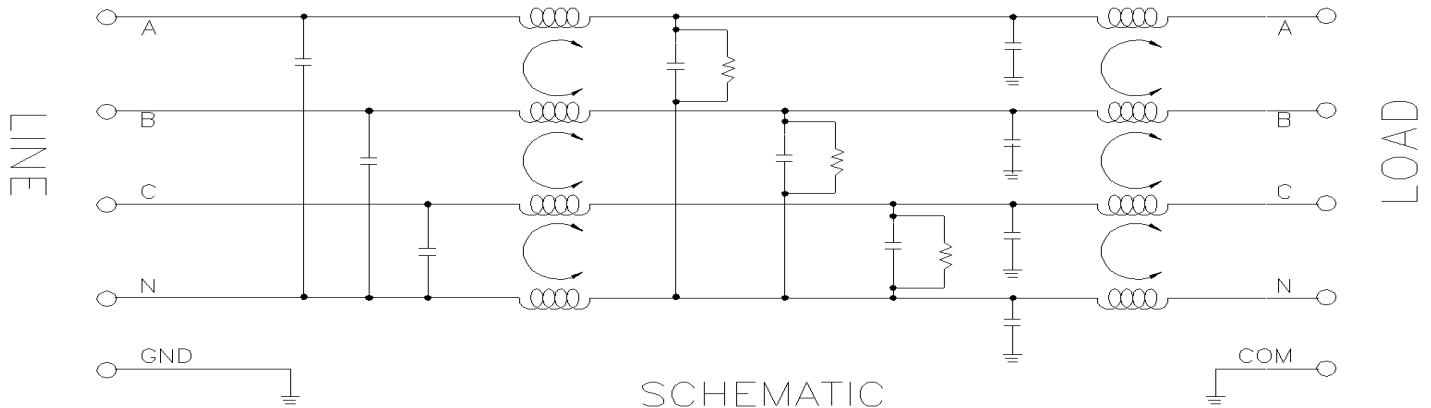

SPECIFICATIONS

1.0 HIGHPOT RATING:

LINE-TO-GROUND: 2000 VAC
LINE-TO-LINE: 2400 VDC

2.0 MAXIMUM LEAKAGE CURRENT, 250 VAC,
60 Hz, EACH LINE TO GROUND.
1.0mA MAX

3.0 RATED VOLTAGES AND FREQUENCY:
250/440 VAC, 47-63 Hz

4.0 PERFORMANCE

	0.05	0.15	0.50	1.50	5.00	20.0
C/M L/G	10 dB	50 dB	55 dB	65 dB	65 dB	65 dB
D/M L/L	20 dB	50 dB	50 dB	60 dB	60 dB	60 dB

5.0 DIMENSIONS

NOTE: FOR MOUNTING OPTIONS SEE PAGE 2

PART NUMBER	RATED CURRENT	NOTE: FOR MOUNTING OPTIONS SEE PAGE 2										
		A	B	C	D1	D2	D3	D4	F	G	J	K
TPYA15-4FF	15	7.00	4.00	4.00	7.81	3.25	—	—	1.33	0.80	.18X.37	#8-32UNC
TPYA15-4IF	15	7.00	4.00	4.00	—	3.25	3.25	7.40	1.33	0.80	.18X.37	#8-32UNC
TPYA15-4SF	15	7.00	4.00	4.00	—	3.25	3.25	7.40	1.33	0.80	.18X.37	#8-32UNC
TPYA30-4FF	30	8.00	5.00	4.75	9.00	4.00	—	—	1.58	1.00	.25X.50	#10-32UNC
TPYA30-4IF	30	8.00	5.00	4.75	—	4.00	3.75	8.50	1.58	1.00	.25X.50	#10-32UNC
TPYA30-4SF	30	8.00	5.00	4.75	—	4.00	3.75	8.50	1.58	1.00	.25X.50	#10-32UNC
TPYA45-4FF	45	11.00	5.00	4.75	11.96	4.00	—	—	1.58	1.00	.25X.50	#1/4-20UNC
TPYA45-4IF	45	11.00	5.00	4.75	—	4.00	3.75	11.49	1.58	1.00	.25X.50	#1/4-20UNC
TPYA45-4SF	45	11.00	5.00	4.75	—	4.00	3.75	11.49	1.58	1.00	.25X.50	#1/4-20UNC
TPYA60-4FF	60	12.00	6.50	4.75	13.00	5.50	—	—	1.58	1.25	.31X.62	#1/4-20UNC
TPYA60-4IF	60	12.00	6.50	4.75	—	5.50	3.75	12.50	1.58	1.25	.31X.62	#1/4-20UNC
TPYA60-4SF	60	12.00	6.50	4.75	—	5.50	3.75	12.50	1.58	1.25	.31X.62	#1/4-20UNC

6.0 FEATURES


- * RUGGED CONSTRUCTION
- * REDUCES RADIATED AND CONDUCTED EMISSIONS FROM VFD
- * SUITABLE EITHER FOR WYE OR DELTA CONNECTION




TRI-MAG, Inc.
 your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
 tri-mag@worldnet.att.net


THREE PHASE WYE FILTERS, 250/440VAC, TPYA FILTERS

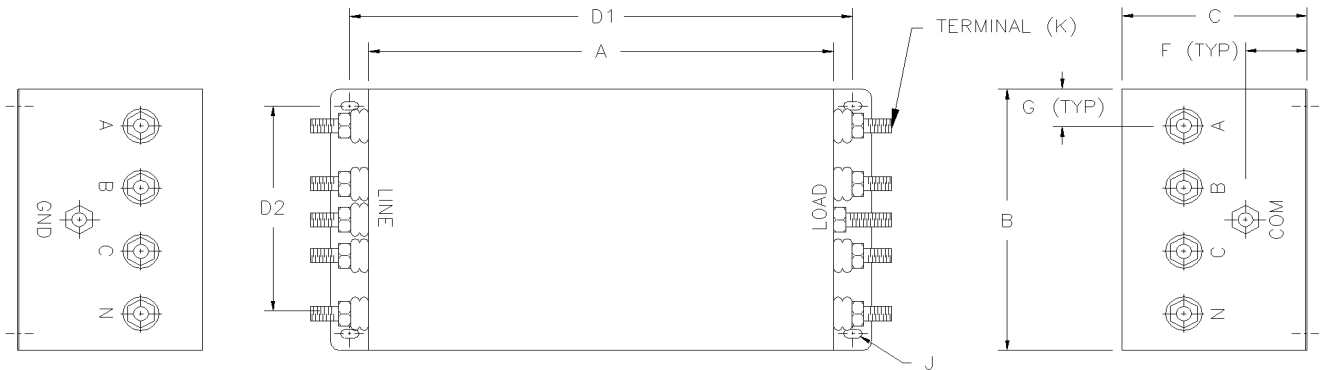

FF OPTION

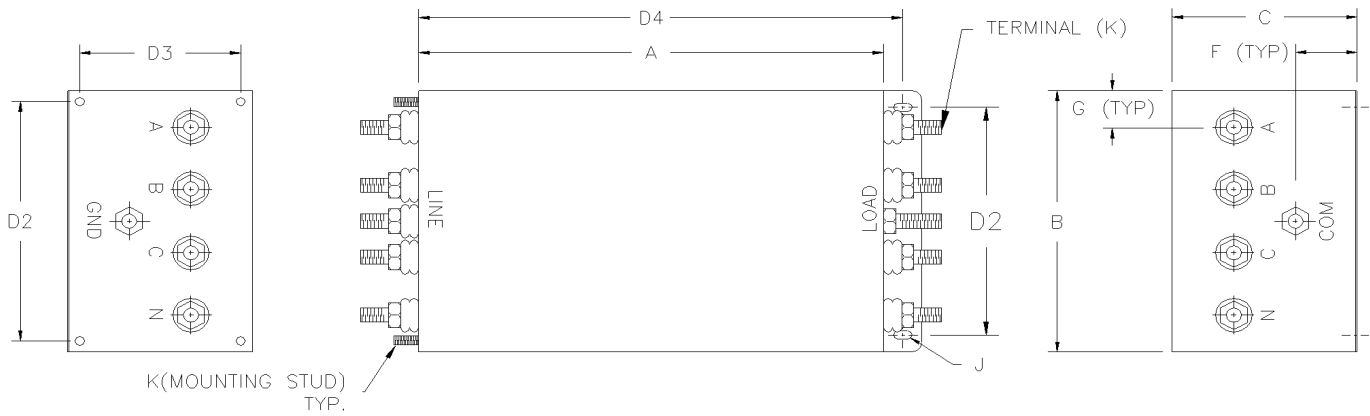

SF OPTION

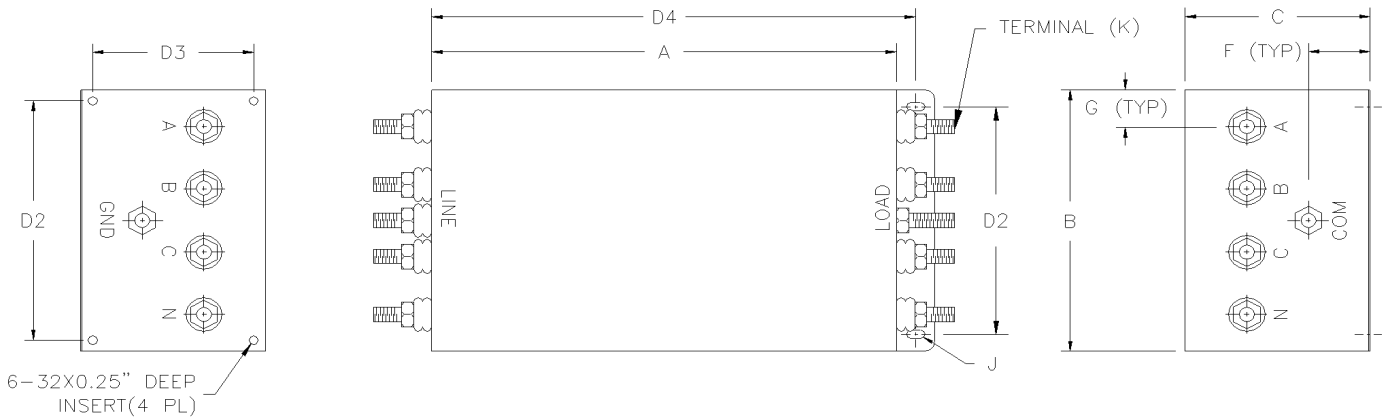

IF OPTION