



TRI-MAG, Inc.
your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
sales@tri-mag.com

DZ100 SERIES

100 Watts with PFC

UNIVERSAL INPUT



GENERAL SPECIFICATIONS

Input Voltage..... 90VAC to 264VAC
 Input Frequency..... 47Hz to 63Hz
 Power Factor..... >0.95
 Inrush Current (cold)..... Less than 50A at 220VAC, 25°C
 Operating Temperature..... 0 to 70°C
 Storage Temperature..... -20°C to 85°C
 Cooling..... Free Air Convection for 100W 18CFM for 130W
 Efficiency..... 85-90% Typical
 Holdup Time..... >20ms at 115VAC
 Overtoltage Type..... Latch Off
 Overload Protection..... Auto Recovery
 Short Circuit Protection..... Auto Recovery
 Designed in full compliance with..... UL 60950-1 CSA 22.2 #234 EN60950-1
 EMI..... EN55022 "B" FCC docket class "B"
 Harmonics..... EN61000-3-2 Class D
 EMS..... EN61000-4-2,-3,-4,-5,-6,-8,-11

DESCRIPTION

DZ100 series is a univernal input multiple output power supply. The series is a 100 watts power supply in the size of 3"x 5" with PFC and high density 6W/in³. The efficiency can reach up to 85-90% depending on model.



FEATURES

- EMI FCC Class B
- Power Factor Correction
- No Minimum Load Required
- Single and Multiple Output
- Universal input 90VAC to 260VAC


APPLICATIONS

- Computer Peripherals
- Telecommunications
- Tape Drives
- Test Instrumentation Product
- Data Acquisition
- Medical

MECHANICAL SPECIFICATIONS

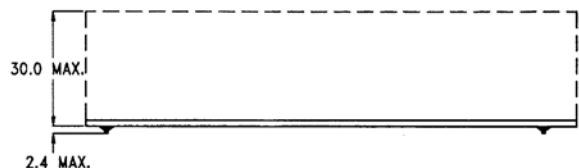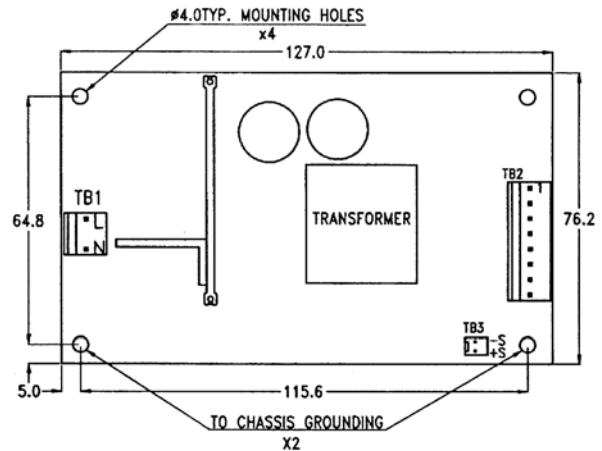

Dimensions shown in mm as above. Tolerance: +/- 0.4mm.
 Size: DZ100-6,-7,-8,-9,-14,-18 DZ100-2,-3,-19
 127.0mm X 76.2mm X 30mm 127.0mm X 76.2mm X 32mm
 5" X 3" X 1.18" 5" X 3" X 1.26"
 Connectors: AC input: Molex 5277-02A or equivalent
 DC output: Molex 5273 or equivalent
 Remote Sense: Molex 5045-02A or equivalent.

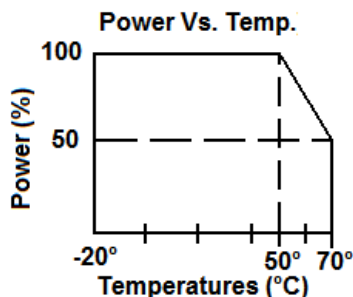



TRI-MAG, Inc.
your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
sales@tri-mag.com

OUTPUT SPECIFICATIONS

Model	Watts	Voltage (Vdc)	Load (A)			Tolerance ±	Ripple & Noise	Regulation	
			Min.	Rate	Peak			Line	Load
DZ100-6	100	+5V	0	20	26	1%	50 mV	0.5%	±1%
DZ100-7	100	+12V	0	9	10.8	1%	120 mV	0.5%	±1%
DZ100-8	100	+15V	0	7	8.7	1%	120 mV	0.5%	±1%
DZ100-9	100	+24V	0	4.5	5.4	1%	200 mV	0.5%	±1%
DZ100-2	100	+5V	0	11.5	15	1%	50 mV	0.5%	±1%
		+12V	0	3	5	5%	100 mV	0.5%	±5%
		-12V	0	0.5	1	5%	100 mV	0.5%	±5%
DZ100-19	100	+3.3V	0	10	15	3%	50 mV	0.5%	+1%
		+5V	0	8	10	5%	50 mV	0.5%	±5%
		+12V	0	0.5	1	5%	100 mV	0.5%	±5%
DZ100-14	100	+48V	0	2.3	2.7	1%	200 mV	0.5%	±1%
DZ100-18	100	+3.3V	0	25	30	1%	50 mV	0.5%	±1%
DZ100-3	100	+5V	0	7.0	10	1%	50 mV	0.5%	+1%
		+12V	0	8.0	10	5%	120 mV	0.5%	±5%

Note: Contact factory for Safety Agency Approved status.

- Each output can provide up to peak load temporarily. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- Load regulation is defined by changing ±40% of measured output load from 60% rated load.
- The ripple and noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47 µF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to 95% output voltage at rated load and nominal line.



TRI-MAG, Inc.
your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
sales@tri-mag.com

DZ100 SERIES 100 WATT— PIN ASSIGNMENT

Model \ Pin	1	2	3	4	5	6	7	8	9	10
DZ100-2	+5V	+5V	+5V	COM	COM	COM	COM	+12V	-12V	
DZ100-6	+5V	+5V	+5V	COM	COM	COM				
DZ100-7	+12V	+12V	+12V	COM	COM	COM				
DZ100-8	+15V	+15V	+15V	COM	COM	COM				
DZ100-9	+24V	+24V	+24V	COM	COM	COM				
DZ100-14	+48V	+48V	+48V	COM	COM	COM				
DZ100-18	+3.3V	+3.3V	+3.3V	COM	COM	COM				
DZ100-19	+3.3V	+3.3V	COM	COM	COM	COM	COM	+5V	+5V	+12V
DZ100-3	+12V	+12V	COM	COM	COM	COM	+5V	+5V		

ENCLOSURES (optional)

Note: Package options are available for this series, EU type (U shape) and EC type (Enclosed)

EC




EU




*Note DZ065 pictured in chassis

Figure	Inches	(mm)
A	6.22	158
B	3.66	93
C	1.45	36.8
D	5.00	127
E	1.93	49
F	0.79	20
G	0.79	20
H	0.28	7.11
I	0.86	21.8
J	4.00	101.6

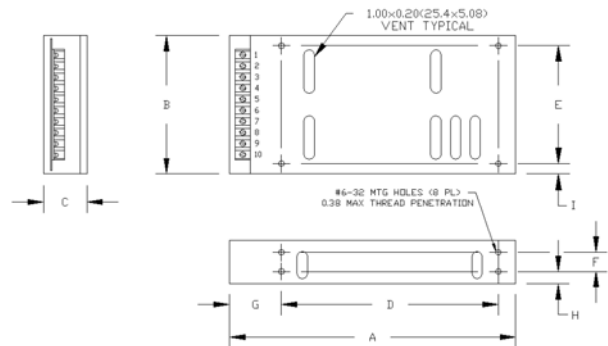


EUS

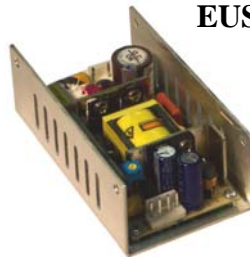

*Note DY040 pictured in chassis

ECS

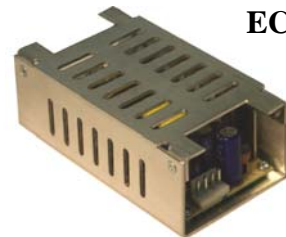

Our Standard power supplies, the DZ100 Series, can be installed into a fully enclosed chassis or in a 'U' shape chassis as an option. These options offer two mounting planes to choose from. The fully enclosed option help to reduce radiated noise.