



**TRI-MAG, Inc.**  
*your* POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291  
 (559) 651-2222 • FAX (559) 651-0188  
<http://www.tri-mag.com>  
[sales@tri-mag.com](mailto:sales@tri-mag.com)

# SNP-C15 SERIES

## 150 Watts

### Industrial Applications

## 225 Watts Peak Current



### GENERAL SPECIFICATIONS

Input Voltage..... 85VAC to 264VAC  
 Input Frequency..... 47Hz to 63Hz  
 Inrush Current (cold)..... Less than 30A at  
 115VAC, 25°C  
 Operating Temperature..... -20 to 70°C  
 de-rated 2.5%/°C >50°C  
 Storage Temperature.....-40°C to 85°C  
 Cooling..... Free Air Convection  
 Efficiency.....82% to 87%  
 Holdup Time.....>16ms at 115VAC  
 Overvoltage Type..... Latch Off  
 Overload Protection..... Auto recovery  
 Short Circuit Protection.....Auto recovery  
 Designed in full compliance with UL 60950-1,  
 CSA 22.2 #60950-1,  
 EN60950-1  
 EMI .....FCC "B"  
 EN55022 "B", EN55011 "B"  
 EMS.....EN61000-4-2,-3,-4,-5,-6,-8,-11  
 Harmonics..... EN61000-3-2

### DESCRIPTION


SNP-C15 series is a universal input single output power supply. The series is a 150 watt power supply in the size of 3.74"x 7.83" with a wattage density of 3.42W/in<sup>3</sup>. The efficiency can reach up to 82-87% depending on model.

### FEATURES


- EMI FCC Class B
- No Minimum Load Required
- Single & Multiple Outputs
- Universal input 90VAC to 264VAC
- LED Indicator

### APPLICATIONS

- Computer Peripherals
- Telecommunications
- Tape Drives
- Test Instrumentation Product
- Data Acquisition
- Industrial

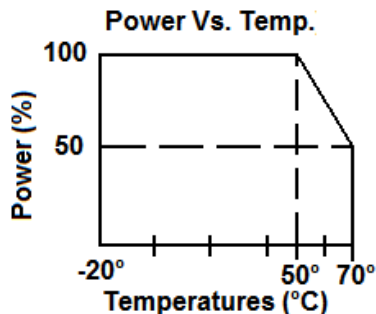

### MECHANICAL SPECIFICATIONS

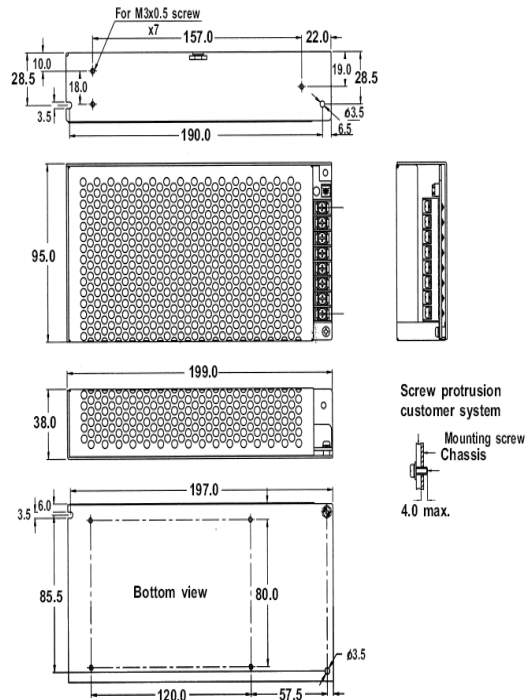

Connector:  
 AC input & DC output : Terminal Block 8.25mm / 0.325" Spacing  
 Size: 95mm x 199mm x 38mm ; 3.74" x 7.83" x 1.5"  
 Net Weight 770g approx. / Unit



**TRI-MAG, Inc.**  
 your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291  
 (559) 651-2222 • FAX (559) 651-0188  
<http://www.tri-mag.com>  
[sales@tri-mag.com](mailto:sales@tri-mag.com)

**OUTPUT SPECIFICATIONS**

Model	Watts	Voltage (Vdc)	Load (A)			Voltage Tolerance	Ripple & Noise Pk to Pk	Regulation		
			Min.	Rate	Peak			Line	Load	
SNP-C157	150	+12V	0	12.5	19	+11.4V~+12.6V	120mVpp	±1%	±1%	
SNP-C158	150	+15V	0	10	15	+14.25V~+15.75V	150mVpp	±1%	±1%	
SNP-C159	150	+24V	0	6.5	10	+22.8V~+25.2V	240mVpp	±1%	±1%	
SNP-C15T	150	+48V	0	3.2	5	+45.6.8V~+50.4V	240mVpp	±1%	±1%	
SNP-C153	150	+5V	0	12	18	+4.95V~+5.05V	50mVpp	±1%	±1%	
		+12V		6		+11.4V~+12.6V	120mVpp			
SNP-C15A	150	+5V	0	8	12	+4.95V~+5.05V	50mVpp	±1%	±3%	
		+24V		4		+22.8V~+25.2V	240mVpp			
SNP-C150	150	+5V	0	12	20	+4.95V~+5.05V	50mVpp	±1%	±3%	
		+12V		5		+11.4V~+12.6V	120mVpp			
		-12V		0		0.5	-11.4V~-12.6V			120mVpp
		-5V		0		1	-4.95V~-5.05V			50mVpp
SNP-C154	150	+5V	0	11	20	+4.95V~+5.05V	50mVpp	±1%	±3%	
		+15V		4		+14.25V~+15.75V	150mVpp			
		-15V		0		0.5	-14.25V~-15.75V			150mVpp
		-5V		0		1	-4.95V~-5.05V			50mVpp
SNP-C15F	150	+5V	0	7	10	+4.95V~+5.05V	50mVpp	±1%	±3%	
		+12V		3		+11.4V~+12.6V	150mVpp			
		+24V		0		0.5	+22.8V~+25.2V			240mVpp
		-5V		0		0.5	-4.95V~-5.05V			120mVpp

**Note:** Contact factory for Safety Agency Approved status.

**SNP-C15 SERIES 150WATT— PIN ASSIGNMENT**

Model \ Pin	1	2	4	4	5	6	7	8
SNP-C157	AC/L	AC/N	Earth	GND	+12V			
SNP-C158	AC/L	AC/N	Earth	GND	+15V			
SNP-C159	AC/L	AC/N	Earth	GND	+24V			
SNP-C15T	AC/L	AC/N	Earth	GND	+48V			
SNP-C153	AC/L	AC/N	Earth	+12V	GND	+5V		
SNP-C15A	AC/L	AC/N	Earth	+24V	GND	+5V		
SNP-C150	AC/L	AC/N	Earth	-12V	-5V	+12V	GND	+5V
SNP-C154	AC/L	AC/N	Earth	-15V	-5V	+15V	GND	+5V
SNP-C15F	AC/L	AC/N	Earth	-12V	+24V	+12V	GND	+5V