



TRI-MAG, Inc.
 your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
tri-mag@worldnet.att.net

UV480 SERIES

80 Watt

UNIVERSAL INPUT



DESCRIPTION

Tri-Mag, Inc. UV480 Series is an 80 watt switchers feature universal input voltage (85-265VAC) and a wide input frequency range of 47Hz to 63Hz.


This series of switchers offers up to four outputs with a maximum 80 watts of continuous output power. Input line filtering is provided to meet the basic requirements of EMI/RFI regulations. The technology of PWM flyback and high speed Mosfet design permits high efficiency an low minimum load requirements. This series is also equipped with thermal protection to prevent overheat damage due to overload or cooling problems.

FEATURES

- 85 TO 265VAC Universal Input
- Compact & Low Cost
- Overload Protection
- Overvoltage Protection
- Short Circuit Protection
- 100% Hi-Pot Test
- 100% Cycling On-Off Burn-In Test
- Built-in Line Filter to Meet FCC Class B

APPLICATIONS

- Portable computer Systems
- Plotters, Printers
- Color Monitors, CRT Terminals
- Robotics, Instrumentation
- General Purpose
- Medical Equipment
- Industrial and Process Control

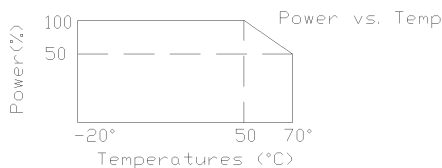

GENERAL SPECIFICATIONS

Input Voltage.....	85VAC to 265VAC or 120VDC to 350VDC
Input Frequency.....	47Hz to 63Hz
Inrush Current (cold).....	30A @ 115VAC 60A @ 230VAC
Operating Temperature.....	0 to 50°C Linear Derating to 50% load @ 70°C
Storage Temperature.....	- 20°C to 85°C
Cooling.....	Free Air Convection
Efficiency.....	75% Typical
Holdup Time.....	16ms at 115VAC
Overvoltage Type.....	Crowbar Trip Point, 6.2V ± 0.4V or Rated Output +2V
Overload Protection.....	Foldback at 150% load
Switching Frequency.....	>30KHz
Safety:	Designed in full compliance with..... UL 1950 CSA 22.2 #234

7.0 MECHANICAL SPECIFICATION

MECHANICAL SPECIFICATIONS:
 Dimension Shown in Inch (mm)

PC Board Size:
 6.0" x 4.0" x 2.008"
 (152.4mm x 101.6mm x 51.0mm)

Weight:
 500 Grams Approx.

MOUNTING HOLE:
 5.606" x 3.606" (142.4mm x 91.6mm)

TB1:
 AC Input, Using Molex 5277-2 or Equivalent

TB2:
 DC Output, Using Molex 5273-10 or Equivalent

TB3:
 For 24V DC-FAN use only: Molex 5045-2 or Eq.

TB4:
 For LED use only: Molex 5045-2 or Equivalent



TRI-MAG, Inc.

® *your* **POWER Specialists**

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
tri-mag@worldnet.att.net

UV480 SERIES 80 WATT— PIN ASSIGNMENT

Pin	1	2	3	4	5	6	7	8	9	10
UV480-1	+5V	+5V	+5V	COM	COM	COM	+12V	+12V	-12V	-5V
UV480-2	+5V	+5V	+5V	COM	COM	COM	+12V	+12V	-12V	N/C
UV480-3	+5V	+5V	+5V	COM	COM	COM	+12V	+12V	N/C	-5V
UV480-4	+5V	+5V	+5V	COM	COM	COM	+12V	+12V	N/C	N/C
UV480-5	+5V	+5V	+5V	COM	COM	COM	+15V	+15V	-15V	-N/C
UV480-6	+5V	+5V	+5V	+5V	COM	COM	COM	COM	COM	COM
UV480-7	+12V	+12V	+12V	+12V	COM	COM	COM	COM	N/C	N/C
UV480-8	+15V	+15V	+15V	+15V	+15V	COM	COM	COM	N/C	N/C
UV480-9	+24V	+24V	+24V	+24V	COM	COM	COM	COM	N/C	N/C
UV480-10	+5V	+5V	+5V	COM	COM	COM	+24V	+24V	+15V	-15V
UV480-11	+12V	+12V	+12V	+12V	COM	COM	COM	COM	+5V	+5V
UV480-12	+24V	+24V	+24V	+24V	COM	COM	COM	COM	+5V	+5V
UV480-14	+48V	+48V	+48V	+48V	COM	COM	COM	COM	N/C	N/C

UV480 SERIES 80 WATT— OUTPUT SPECIFICATIONS

Model	Voltage (Vdc)	Load (A)			Tolerance ±	Ripple & Noise	Regulation	
		Min.	Rate	Peak			Line	Load
UV480-1	+5V	0	8.0	12.0	1%	50 mV	1%	3%
	+12V	0	3.0	5.0	5%	100 mV	1%	3%
	-12V	0	0.5	1.0	10%	100 mV	1%	5%
	-5V	0	0.5	1.0	10%	100 mV	1%	5%
UV480-2	+5V	0	8.0	12.0	1%	50 mV	1%	3%
	+12V	0	3.0	5.0	5%	100 mV	1%	3%
	-12V	0	0.5	1.0	10%	100 mV	1%	5%
UV480-3	+5V	0	8.0	12.0	1%	50 mV	1%	3%
	+12V	0	3.0	5.0	5%	100 mV	1%	3%
	-5V	0	0.5	1.0	10%	100 mV	1%	5%
UV480-4	+5V	0	8.0	12.0	1%	50 mV	1%	1%
	+12V	0	3.0	5.0	5%	100 mV	3%	3%
UV480-5	+5V	0	8.0	12.0	1%	50 mV	1%	3%
	+15V	0	1.5	1.7	5%	100 mV	1%	3%
	-15V	0	1.5	1.7	5%	100 mV	1%	5%
UV480-6	+5V	0	16	-	1%	100 mV	1%	1%
UV480-7	+12V	0	7.0	-	1%	100 mV	1%	1%
UV480-8	+15V	0	6.0	-	1%	100 mV	1%	1%
UV480-9	+24V	0	3.8	-	1%	150 mV	1%	1%
UV480-10	+5V	0	4.0	8.0	1%	50 mV	1%	3%
	+15V	0	0.5	1.0	10%	100 mV	1%	5%
	-15V	0	0.5	1.0	10%	100 mV	1%	5%
	+24V	0	2.0	3.0	5%	150 mV	1%	5%
UV480-11	+12V	0	6.5	8.5	5%	120 mV	1%	1%
	+5V	0	1.0	1.3	5%	50 mV	1%	5%
UV480-12	+24V	0	3.3	-	1%	120 mV	1%	1%
	+5V	0	1.0	-	5%	50 mV	1%	5%
UV480-14	+48V	0	1.66	-	1%	300 mV	1%	1%

Note: Contact factory for Safety Agency Approved status.

All specifications and prices subject to change without notice