


DV200 Series | ITE & Medical Safety

200W/300W Max/360W Peak

- Built-in active PFC
- UL/CSA/EN 60950-1, 2nd edition (ITE)
ANSI/ANMI/CSA/EN 60601-1, 3rd edition (Medical)
- Fan output
- Operation from -20°C to 70°C - convection
- Approved for 2xMOPP applications
- U-Frame (EU) and enclosed (EC) versions available
- 10-year warranty

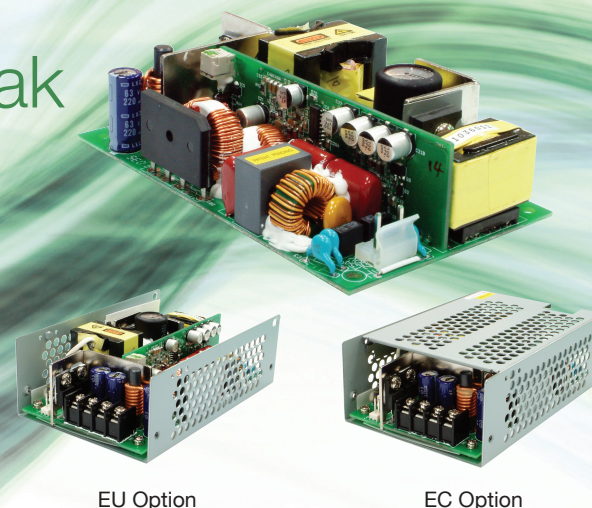

GREEN POWER

Description

The **DV200 (ITE)** and **DV200M (Medical) Series** is a 200 Watt open frame power supply that is 3"x 5"x 1.38" providing 9.7 Watts per cubic inch. Each unit has a built in active power factor correction and the efficiency of the series is typically 89% depending on model. The DV200 is compliant with green power, Energy Star Level VI and ErP EC 1275/2008. The series is rated at 200 Watts free air convection cooling and up to 300 Watts with 18CFM forced air. This series is available with an optional "U" frame (EU) or covered metal enclosure (EC).

Specifications

Input

Input Voltage	• 90 VAC to 264 VAC, 115/230V nominal
Input Frequency	• 47 Hz to 63 Hz
Inrush Current	• < 40/60A at 115/230 VAC, cold start, 25°C
Power Factor	• >0.93
Input Protection	• Internal T3.15 A / 250 VAC fuse in line
No Load Input Power	• < 0.5W
Input Current	• 4A max at 115 VAC, 2A max at 230VAC
Leakage Current	

Output

Output Voltage	• 12VDC, 24VDC, See tables on page 2
Initial Set Accuracy	• 0.1VDC
Minimum Load	• No minimum load required
Start-Up Rise Time	• 16 ms typical
Hold-Up Time	• > 16 ms typical
Line Regulation	• < ±0.5% typical
Load Regulation	• < ±1.0% typical
Ripple & Noise	• < 1% pk-pk typical, 15MHz Bandwidth
Overvoltage Protection	• latch off
Overload Protection	• auto recovery
Short Circuit Protection	• auto recovery

Environmental

Operating Temperature	• -20°C to 70°C derating: 2.5%/°C, 50°C < T ≤ 70°C
Cooling	• 200W; free air convection 300W; 18CFM forced air
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -20°C to +85°C
Altitude	• 0 to 5000 m

General

Efficiency	• >89% typical at rated load
Energy Saving	• Energy Star Level VI
Isolation	• 4000 VAC Input to Output, 2 x MOPP 1500 VAC Input to Ground, 1 x MOPP 1500 VDC Output to Ground, 1 x MOPP
Isolation Resistance	• 50 MΩ
Switching Frequency	• 120 kHz typical
MTBF	• >150 kHrs to MIL-HDBK-217F at 50°C

EMC & Safety

Safety Approvals:	• UL/CSA/EN 60950-1, 2nd edition (ITE) • ANSI/AMMI/CSA/EN 60601-1, 3rd edition • CE Mark and CB report
Harmonic Currents	• EN 61000-3-2 class D
EMI	• EN55022 (CISPR 22) Class B, EN610000-3-2 Class D, EN 61000-3-3, EN5501 Level B
ESD Immunity	• EN 61000-4-2, 6kV/contact, 8kV/air
Radiated Immunity	• EN 61000-4-3, 10V/m with 80% AM
EFT Burst	• EN 61000-4-4, 2kV
Surge	• EN 61000-4-5, 2kV/L-L, 4kV/L-G
Conducted Immunity	• EN 61000-4-6, 10V with 80% AM
Magnetic Fields	• E61000-4-8, 10A/m
Dips & Interruptions	• EN 61000-4-11, 30% dips 500ms, 60% dips 200ms, 95% dips 10ms, 5000 ms, 20ms, Criterion A, B, A, B, A

Warranty

Manufacturer's Warranty	• 10 years. Call Tri-Mag or go to tri-mag.com for details.
-------------------------	---

DV200 Series | ITE & Medical Safety

Output Specifications

Model No.	Application	Output Rail	Load (A)				Voltage Accuracy	Ripple Noise	Line Reg.	Load Reg.
			Min	Rated	Max	Peak				
DV200(M)-7	ITE/Medical	+12V	0A	16.6A	25.0A	30.0A	+11.9V~+12.1V	<120mVpp	± 0.5%	± 1%
DV200(M)-9	ITE/Medical	+24V	0A	8.3A	12.5A	16.7A	+23.9V~+24.1V	<200mVpp	± 0.5%	± 1%

Notes

1. **Output Load:**
Convection cooling: 200W; forced-air cooling: 300W max
2. **Peak Load Duration:**
360W peak rating for durations up to 5 secs. (Duty cycle <10%, avg. power <200W)
3. **Engineering Specification:**
Contact Tri-Mag for the specific part number used in your design application.
4. **Standby Power Consumption with System:**
Required by ENERGY STAR in U.S. and ErP regulation in Europe for appliances such as computers and displays. The latest requirement is measured input power to be less than 0.5W with system.
5. **Step Efficiency and Average Efficiency:**
Test conditions in step efficiency are referred to 3.2.2 IPS (Internal Power Supply) of the ENERGY STAR program requirements for computers. ENERGY STAR requirements for efficiency @ 20%, 50%, 100% load are 81%, 88% and 89%; average efficiency is the average of step efficiency.
6. **Optional Chassis Enclosure Ordering Information:**
U-Frame (EU): DG-200(M)-xEU
Enclosure (EC): DG-200(M)-xEC
For Medical versions, add “M” after DV200_, i.e. DV200M-7.

Mechanical Specifications

Notes

1. Mechanical drawing dimensions in mm Tolerance: ± 0.4mm
2. Size: 76.2 x 127 x 35.0 Max. (mm)
3.0 x 5.0 x 1.38 Max. (inches)
3. Packing: Net weight: 345 g approx. / unit
4. Connections: AC Input: PCB Header: JST B2P3-VH or equivalent
Mating Connector: JST VAR-2, VHR-3N or equivalent

DC Output: PCB Header: JST B8P-VH or equivalent
Mating Connector: JST VHR-8N or equivalent

Fan: PCB Header: Molex 22-04-1021 (5045-02A) or equivalent
Mating Connector: Molex 22-01-1022 (5051-02) or equivalent

